



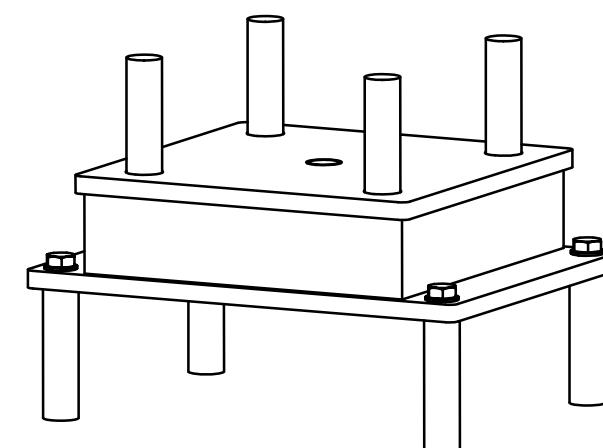

1020

AGOM INTERNATIONAL S.r.l.

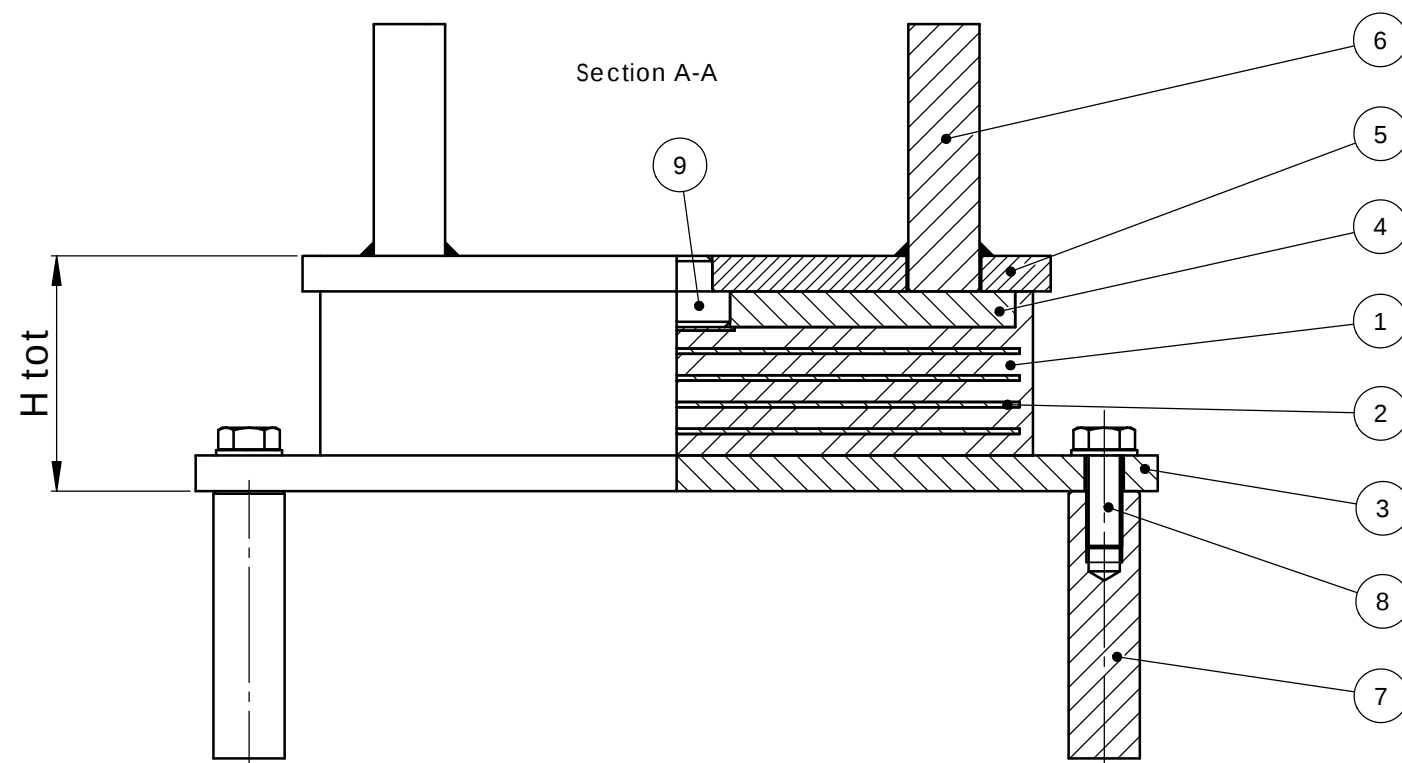

E-Link C4E A x B x H tot(Te) Et
E.g.: E-Link C4E 500x300x119 (56) NR60

* Rubber compound can be changed according to project specification

Note A: Protective Anticorrosion Cycle According to EN 1337-9

- 1 Sand-blasting at white metal SA2.5
- 2 Bicomponent epoxidic covering at high thickness
Minimum thickness dry film a) Exposed surfaces: 250 micron
b) Worked surfaces and contact surfaces of the concrete 70 micron

9	Pin	S275JR - EN10025	A
8	Lower Anchor Bolt	Steel Zinc Coated	-
7	Lower Anchor Bar	S275JR - EN10025	-
6	Upper Anchor Bar	S275JR - EN10025	A
5	Counterplate	S275JR EN10025	A
4	Vulcanized steel plate	S275JR EN10025	A
3	External plate	S275JR EN10025	A
2	Reinforcement Steel Plate	S235JR - EN10025	-
1	Rubber Element	NR 60 ShA *	-
Articolo num.	Description	Materiale	Note


Revision	00	Object	FIRST ISSUE	Date Last modified	29/10/2014
----------	----	--------	-------------	--------------------	------------

Drawn by	A.Durante	Checked by	D.Colombo	Approved by	R.Cerini
----------	-----------	------------	-----------	-------------	----------

	AGOM INTERNATIONAL Srl Via Mesero, 12 20010 Ossona (MI)	
--	---	--

Elastomeric Bearings E-Link Type "C4E (P)"	Drawing number	Scale
	01221	1:4

The information contained in this drawing is the sole property of AGOM INTERNATIONAL Srl.
Any reproduction in part or whole without permission is prohibited.

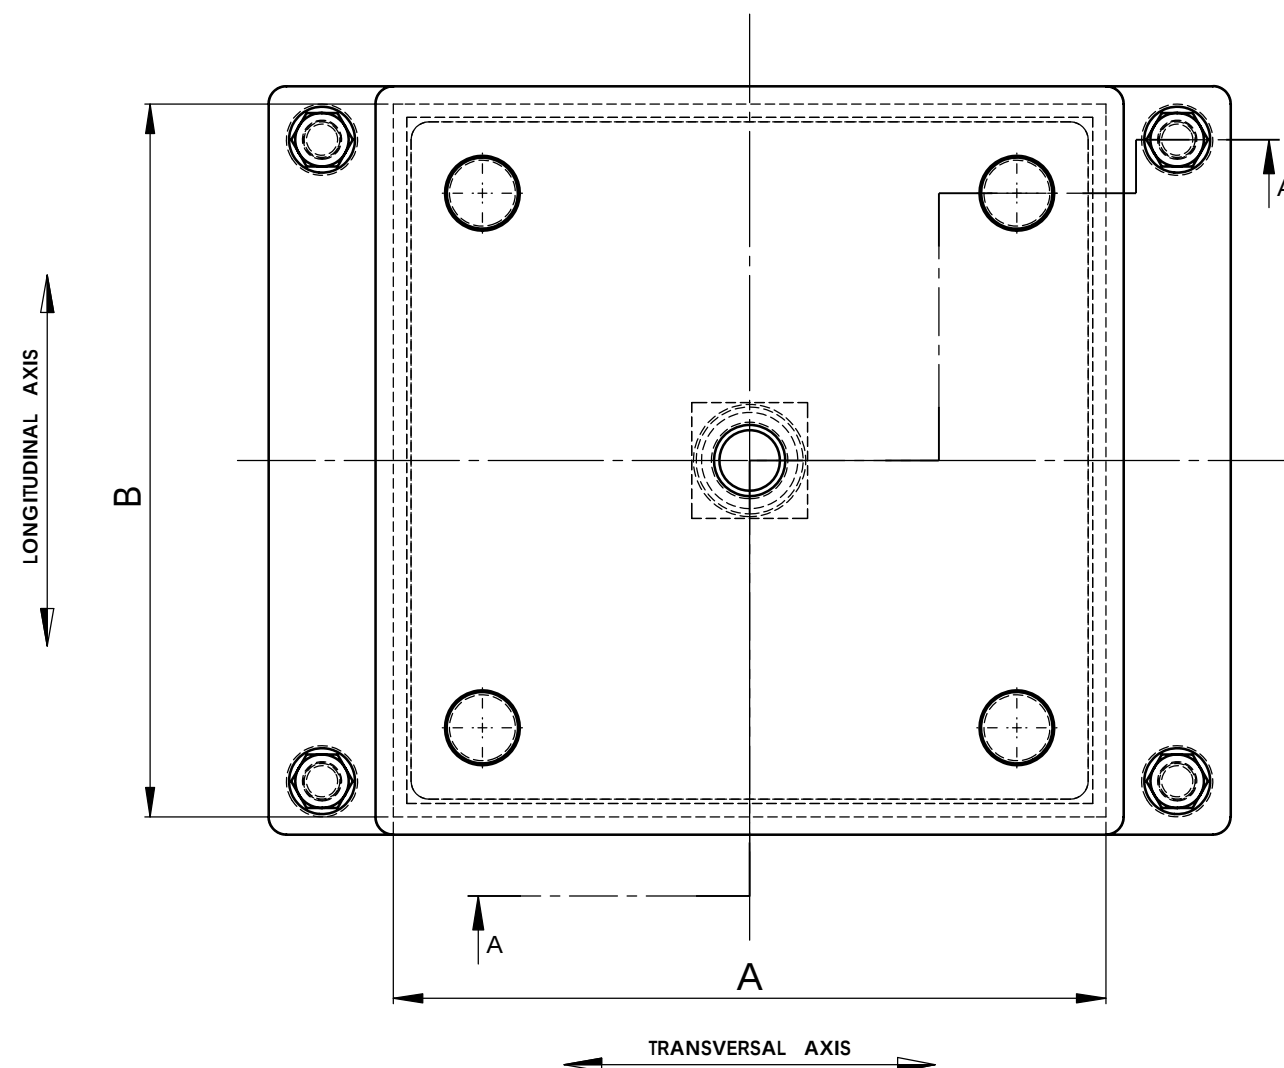

ABBREVIATION: Te=Total nominal thickness of elastomer ; Et = Elastomer type and hardness