






1020

AGOM INTERNATIONAL S.r.l.

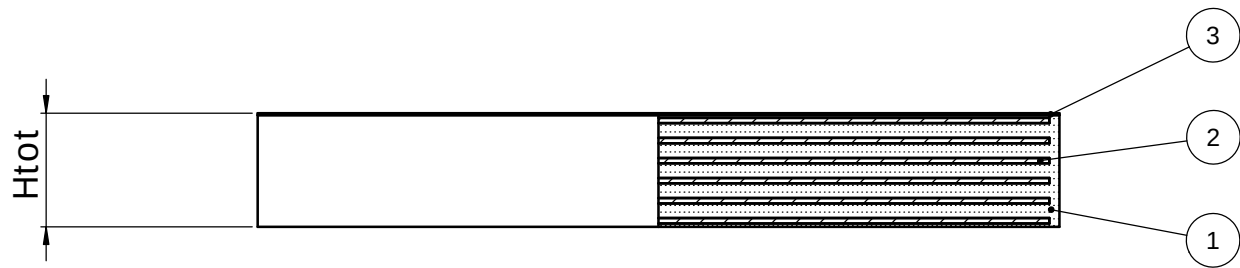

SECTION A-A

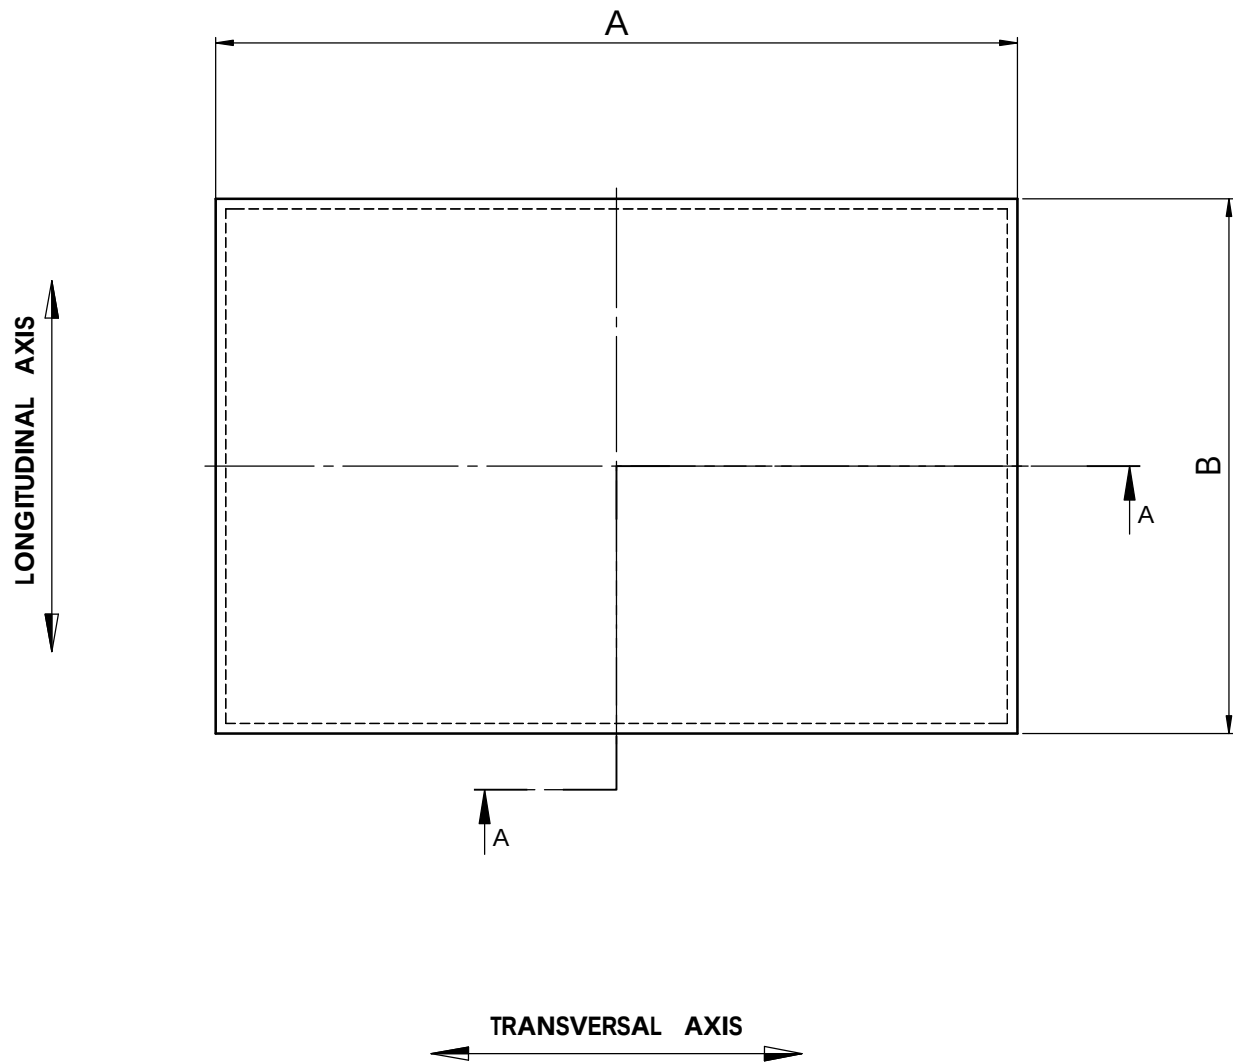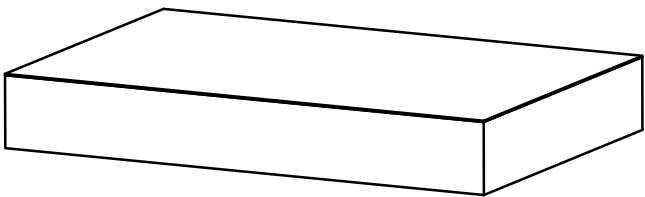

E-Link D A x B x H tot(Te) Et
E.g.: E-Link D 200x100x20 (15) NR60

* Rubber compound can be changed according to project specification

3	Sliding surface	Vulcanized PTFE	-
2	Reinforcement steel plate	S235JR EN10025	-
1	Rubber element	NR 60 ShA (*)	-
Num.	Description	Material	Notes

Revision	00	Object	FIRST ISSUE	Date Last modified	29/10/2014
Drawn by		Checked by		Approved by	
G.Ruco		D.Colombo		M.Battaini	
		AGOM INTERNATIONAL Srl Via Mesero, 12 20010 Ossona (MI)			
Elastomeric Bearings E-Link Type D			Drawing number		Scale
			01317CD		1:4
The information contained in this drawing is the sole property of AGOM INTERNATIONAL Srl. Any reproduction in part or whole without permission is prohibited.					

ABBREVIATION: Te=Total nominal thickness of elastomer ; Et = Elastomer type and hardness